


## FLAT FACE SERIES

### Q3FFV - TECHNICAL DATA FLAT FACE SCREW-LOCK FASTER PROPRIETARY STANDARD

#### Pressure Drop

Data shown in the diagram are indicative and not binding.  
(S) 1 MPa = 10 bar  
Dash size are specified.

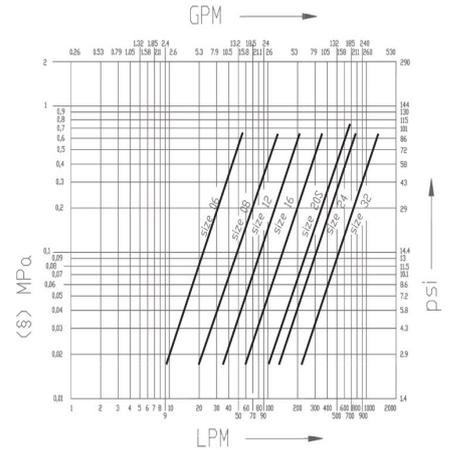

Part Number	ISO Size	Rated Flow (l/min)	Force to connect - lb	Maximum WP Connected - bar	Maximum WP Connected - psi	Minimum BP Disconnected - psi	Minimum BP Connected - psi	Fluid Spill - ml max
Q3FFV-F08	12.5	19	67.4	250	3625	14500	14500	0.01
Q3FFV-F12	20	39.7	67.4	250	3625	14500	14500	0.03
Q3FFV-F16	25	50.2	89.9	300	4350	17400	23200	0.03
Q3FFV-M08	12.5	19	67.4	250	3625	14500	14500	0.01
Q3FFV-M12	20	39.7	67.4	250	3625	14500	14500	0.03
Q3FFV-M16	25	50.2	89.9	300	4350	17400	23200	0.03