


FLAT FACE SERIES

Q3FFV

FLAT FACE SCREW-LOCK

FASTER PROPRIETARY STANDARD

- Please enquire for other combinations of base size and thread form.
- Overall length when connected is calculated based on both couplings having the same thread form and size.
- Recommended for: Industrial, construction, earthmoving.
- Connection: Connect with pressure - screw couplings together to connect. Disconnect with pressure - unscrew couplings to disconnect. Female coupling has safety lock to prevent loosening when connected.
- NOTE: Can be connected with pressure in either or both couplings.
- Latching: Threaded with safety lock.
- Shut-off system: Flat valve.
- Temperature range: -25°C to +100°C
- Standards: Interchangeability according to Faster internal standard.

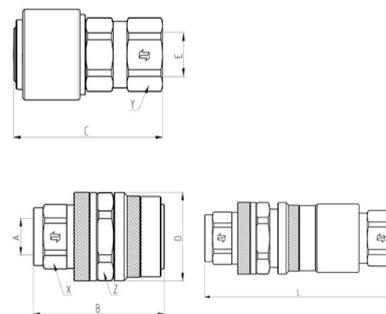

Part Number	Base Size	Threadform	Thread Size	Coupling Length - L1	Coupling O.D - D1	Coupling Length - L1	Hex Size A/F (Hex 1)
Q3FFV-F08	08	BSPPF socket	1/2-14	81.8	45	41	30
Q3FFV-F12	12	BSPPF socket	3/4-14	97.2	54	50	42
Q3FFV-F16	16	BSPPF socket	1-11	101.4	90	65	46
Q3FFV-M08	08	BSPPF socket	1/2-14			87.5	32
Q3FFV-M12	12	BSPPF socket	3/4-14			106.5	42
Q3FFV-M16	16	BSPPF socket	1-11			119.2	46