Hydraulink

PETROLEUM HOSE

RWPS09

MAXIMUS PETROLEUM SUCTION
RUBBER OIL SUCTION - 150 PSI

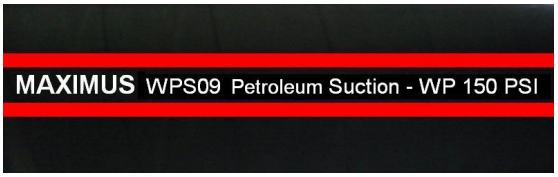

- Conforming Standards: AS2683 Type 1; Grade 2; Kind 1
- Temperature: -20°C to +80°C
- Cover: Black; Smooth Wrapped Finish SBR Rubber
- Tube: Black; NBR Rubber Compound
- Reinforcement: High Strength Synthetic Cord Plus Embedded Steel Helix Wire
- Application: Lightweight Suction Hose for the transfer of petroleum products with an aromatic content up to 30%. Resistant to Abrasion And Weather.

Part Number	Size	Hose I.D (mm)	Hose O.D (mm)	WP (psi)	BP (psi)	Weight kg/mtr
RWPS09-019	19	19.1	29	150	450	0.60
RWPS09-025	25	25.4	35	150	450	0.85
RWPS09-032	32	32.1	42	150	450	0.96
RWPS09-038	38	38.1	48	150	450	1.10
RWPS09-051	51	50.8	63	150	450	1.86
RWPS09-076	76	76.1	89	150	450	2.92
RWPS09-102	102	101.6	118	150	450	4.78

Please contact Hydraulink for further details and availability. Hydraulink reserve the right to change technical specifications without notice.