
Hydraulink

BSP TAPER

S15

BSPT MALE STRAIGHT
BSP TAPERED MALE STRAIGHT

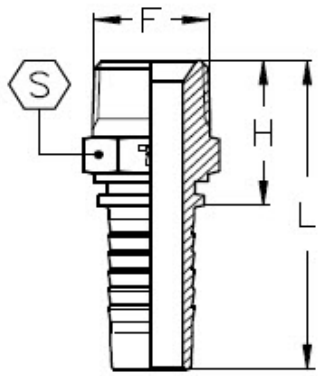

Part Number	BSPT Male Thread (F)	Hose I.D (Inches)	Hose I.D (mm)	Dash size	Hex A/F (S)	Cutoff (H)	Length mm (L)	Working Pressure (bar)	Working Pressure (psi)
S15-0203	1/8-28	3/16	5	03	12	20	45	350	5000
S15-0204	1/8-28	1/4	6.3	04	12	21	49	350	5000
S15-0404	1/4-19	1/4	6.3	04	15	25	53	350	5000
S15-0406	1/4-19	3/8	10	06	15	26	56	350	5000
S15-0408	1/4-19	1/2	12.7	08					
S15-0604	3/8-19	1/4	6.3	04	19	26	54	280	4000
S15-0605	3/8-19	5/16	8	05	19	26	54	280	4000
S15-0606	3/8-19	3/8	10	06	19	27	57	280	4000
S15-0608	3/8-19	1/2	12.5	08	19	28	64	280	4000
S15-0804	1/2-14	1/4	6.4	04					
S15-0806	1/2-14	3/8	10	06	22	32	63	280	4000
S15-0808	1/2-14	1/2	12.5	08	22	33	66	280	4000
S15-0810	1/2-14	5/8	16	10	22	33	69	280	4000
S15-0812	1/2-14	3/4	19	12					
S15-1010	5/8-14	5/8	15.9	10	25	35			
S15-1208	3/4-14	1/2	12.7	08	27	36.2			
S15-1210	3/4-14	5/8	16	10	27	35	71	280	4000
S15-1212	3/4-14	3/4	19	12	27	36	77	280	4000
S15-1216	3/4-14	1	25.4	16	35	41.7			
S15-1612	1-11	3/4	19	12	36	41	82	280	4000
S15-1616	1-11	1	25	16	36	44	101	280	4000
S15-1620	1-11	1 1/4	31.8	20	44.45	52			
S15-2016	1 1/4-11	1	25.4	16	46	45.6			
S15-2020	1 1/4-11	1 1/4	31.5	20	46	51	118	210	3000
S15-2424	1 1/2-11	1 1/2	38	24	50	54	137	185	2700

Please contact Hydraulink for further details and availability. Hydraulink reserve the right to change technical specifications without notice.

Hydraulink®

S15-3232	2-11	2	51	32	65	64	160	175	2500

Please contact Hydraulink for further details and availability. Hydraulink reserve the right to change technical specifications without notice.